



J 55032(H29) TEST REPORT

Applicant	:	XGIMI Technology Co., Ltd
Address of Applicant	:	Building No.4, Zone A, No.1129, Shijicheng Road, Chengdu High-tech Zone, Sichuan Pilot Free Trade Zone, China
Manufacturer	:	XGIMI Technology Co., Ltd
Address of Manufacturer	:	Building No.4, Zone A, No.1129, Shijicheng Road, Chengdu High-tech Zone, Sichuan Pilot Free Trade Zone, China
Equipment under Test	:	Projector
Model No.	:	XR03B
Test Standard(s)	:	J 55032(H29)
Report No.	:	DDT-RE25090923-1E02
Issue Date	:	2025/12/12
Issued By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Table of Contents

1.	Summary of Test Results	6
2.	General Test Information.....	7
2.1.	Description of EUT	7
2.2.	Primary function of EUT	7
2.3.	Port of EUT.....	7
2.4.	Accessories of EUT	8
2.5.	Block diagram EUT configuration for test.....	8
2.6.	Decision of final test mode	11
2.7.	Deviations of test standard	11
2.8.	Test environment conditions	11
2.9.	Test laboratory	12
2.10.	Measurement uncertainty	12
3.	Asymmetric mode conducted emissions	13
3.1.	Test equipment.....	13
3.2.	Block diagram of test setup	13
3.3.	Limits	14
3.4.	Assistant equipment used for test	14
3.5.	Test procedure	15
3.6.	Test result.....	15
3.7.	Test data	16
3.8.	Test photo	18
4.	Conducted disturbance at mains terminals	19
4.1.	Test equipment.....	19
4.2.	Block diagram of test setup	19
4.3.	Limits	20
4.4.	Assistant equipment used for test	20
4.5.	Test procedure	21
4.6.	Test result.....	21
4.7.	Test data	22
4.8.	Test photo	26
5.	Radiated Emissions.....	27
5.1.	Test equipment.....	27
5.2.	Block diagram of test setup	28
5.3.	Limits	31
5.4.	Assistant equipment used for test	31
5.5.	Test procedure	32

5.6. Test result.....32

5.7. Test data 33

5.8. Test photo 41

6. Photos of the EUT 41

Test Report Declare

Applicant	:	XGIMI Technology Co., Ltd
Address	:	Building No.4, Zone A, No.1129, Shijicheng Road, Chengdu High-tech Zone, Sichuan Pilot Free Trade Zone, China
Manufacturer	:	XGIMI Technology Co., Ltd
Address	:	Building No.4, Zone A, No.1129, Shijicheng Road, Chengdu High-tech Zone, Sichuan Pilot Free Trade Zone, China
Equipment under Test	:	Projector
Model No.	:	XR03B

Test Standard Used:
J 55032(H29)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25090923-1E02		
Date of Receipt:	2025/10/18	Date of Test:	2025/10/18-2025/11/04
Created: Eddie Liu	Reviewed: Caesar Peng	Approved: Damon Hu	
Eddie Liu	Caesar Peng		
2025/11/11	2025/12/11	2025/12/12	

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/12/12	Damon Hu

1. Summary of Test Results

EMISSION (EMI)			
Description of Test Item	Standard	Result	Memo
Conducted Differential Voltage Emissions	J 55032(H29)	N/A	antenna port, RF port
Asymmetric mode conducted emissions	J 55032(H29)	PASS	/
Conducted disturbance at mains terminals	J 55032(H29)	PASS	/
Radiated Emissions	J 55032(H29)	PASS	/
Note: All tests were conducted according to the customer's requirements.			

Note 1: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

Note 2: For the EMI measurements have made the EUT operated in a mode producing the highest emission level, and attempted to vary the configuration of the EUT radiated the highest emission. For the EMS measurements have made the EUT operated in the most sensitive mode.

2. General Test Information

2.1. Description of EUT

EUT* Name	: Projector
Model Number	: XR03B
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC 100-240V/50/60Hz
EUT Class (Only For EMI)	: Class B
Maximum Work Frequency	: > 108 MHz
Sample Number	: S25090923-003,S25090923-006

Note 1: EUT is the abbreviation of equipment under test.

Note 2: “☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

Note 3: Equipment meeting Class A requirements may not offer adequate protection to broadcast services within a residential environment; The Class B requirements for equipment are intended to offer adequate protection to broadcast services within the residential environment. Equipment compliant with the class A requirements should have a warning notice in the user manual stating that it could cause radio interference. For example, Warning: Operation of this equipment in a residential environment could cause radio interference.

2.2. Primary function of EUT

Function	Description
☒ Bluetooth	Bluetooth
☒ Display and display output functions	4k/60Hz
☒ Networking	LAN port, Wi-Fi
☒ Networking functions	LAN
☒ Audio output function	Loudspeaker output, ARC output, OPT output

2.3. Port of EUT


Port	Description
☒ Signal data/control port	USB port, OPT port, RS232 port
☒ AC mains power port	AC mains power port
☒ Audio output port	ARC output port, Earphone port, Loudspeaker port
☒ Video input port	HDMI in port
☒ Wired network port	LAN port
☒ Enclosure port	Enclosure port

2.4. Accessories of EUT


Accessories	Manufacturer	Model number	Description
Remote control	/	/	/

2.5. Block diagram EUT configuration for test


Mode 1:HDMI 1 in mode

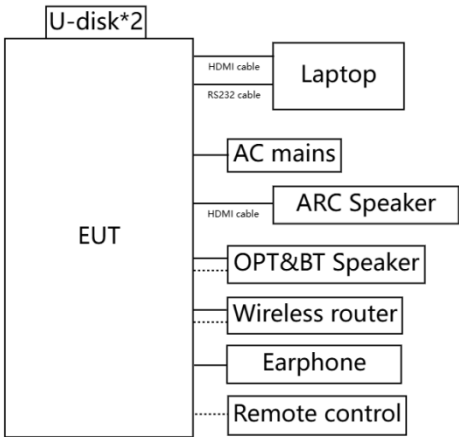


Mode 2:HDMI 2 in mode

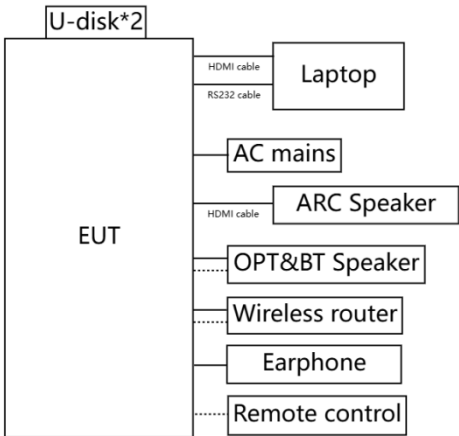


Mode 3:eARC mode

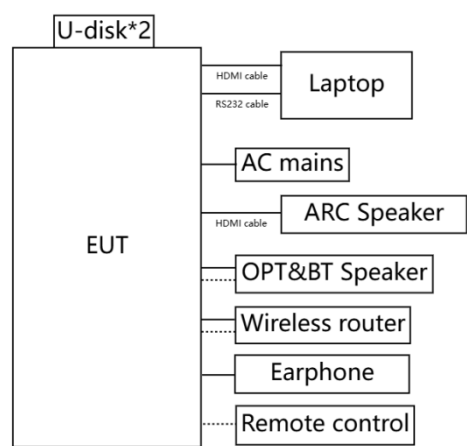


Mode 4:USB 3.0 mode

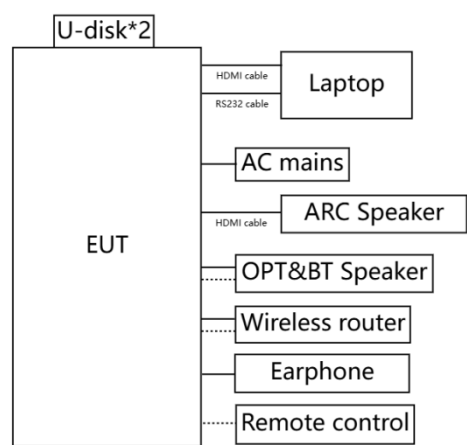


Mode 5:USB 2.0 mode

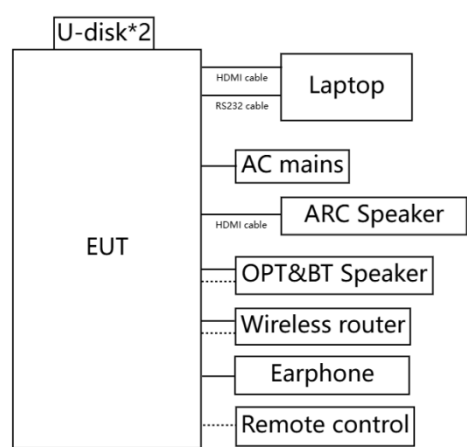


Mode 6:RS232 mode

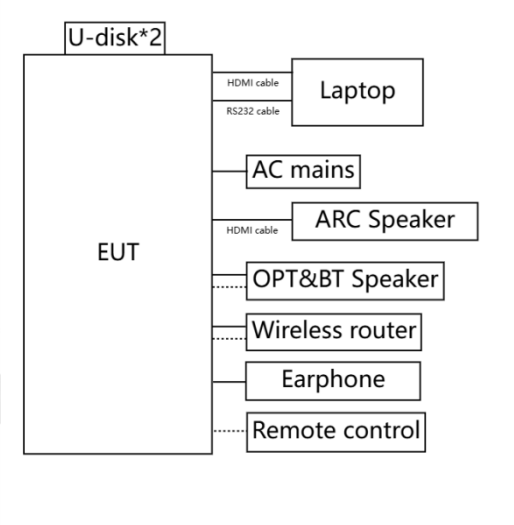


Mode 7:LAN mode

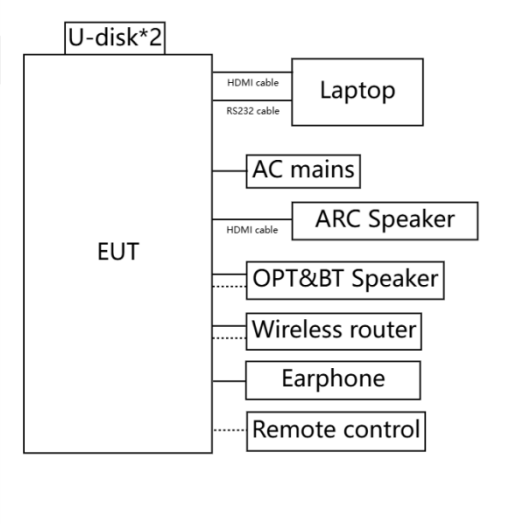

Mode 8:Bluetooth + 2.4GHz Wi-Fi mode

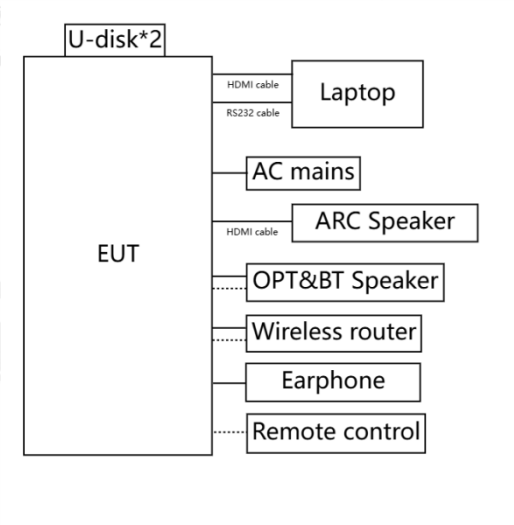

Mode 9:Bluetooth + 5GHz Wi-Fi mode

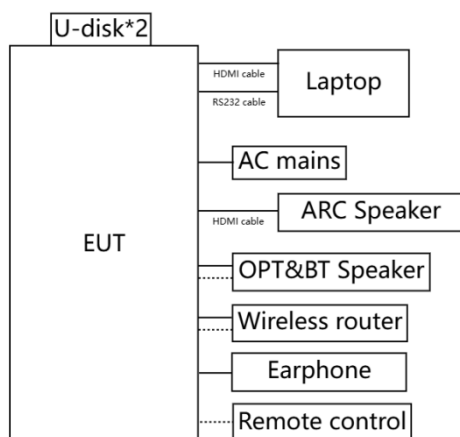

2.6. Decision of final test mode

According pre-test, the worst test modes were reported as below.

Emission	Asymmetric mode conducted emissions	Mode 7: LAN mode
	Conducted disturbance at mains terminals	Mode 1: HDMI 1 in mode
	Radiated Emissions	Mode 1: HDMI 1 in mode

2.7. Deviations of test standard

No deviation.

2.8. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	15-30°C
Humidity range:	25-75%
Pressure range:	86-106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.9. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.10. Measurement uncertainty


Test Item	Uncertainty
Conducted disturbance at mains terminals	1#: 3.72dB (9 kHz to 150 kHz), 3.34dB (150 kHz to 30 MHz)
	2#: 3.75dB (9 kHz to 150 kHz), 3.39dB (150 kHz to 30 MHz)
	3#: 3.78dB (9 kHz to 150 kHz), 3.37dB (150 kHz to 30 MHz)
Uncertainty for telecommunication port conduction emission test	1#: AAN with aLCL = 55 ... 40 dBc: 3.64 dB AAN with aLCL = 65 ... 50 dBc: 4.08 dB AAN with aLCL = 75 ... 60 dBc: 4.56 dB
	2#: AAN with aLCL = 55 ... 40 dBc: 3.82 dB AAN with aLCL = 65 ... 50 dBc: 3.96 dB AAN with aLCL = 75 ... 60 dBc: 4.12 dB
Uncertainty for radiation emission test (30 MHz-1 GHz)	1#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	2#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	3#: 4.96 dB (Antenna Polarize: V) 4.98 dB (Antenna Polarize: H)
	10m: 4.48 dB (Antenna Polarize: V) 4.64 dB (Antenna Polarize: H)
Uncertainty for radiation disturbance test (1 GHz to 6 GHz)	1#: 4.10 dB (1-6 GHz)
	3#: 4.54 dB (1-6 GHz)
Temperature	0.4 °C
Humidity	2%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Asymmetric mode conducted emissions

3.1. Test equipment


Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
EMI Test Receiver	R&S	ESCI [®]	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBEC K	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/

3.2. Block diagram of test setup

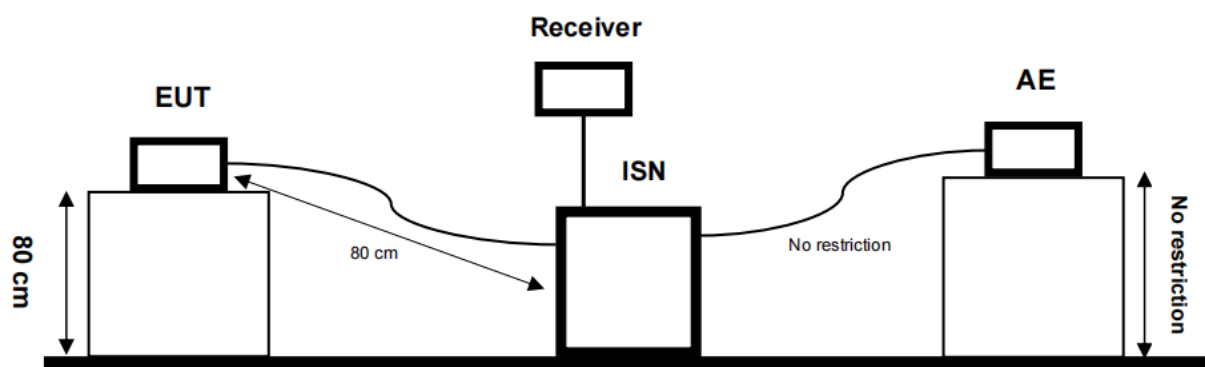

EUT means Equipment Under Test

AE means Associated Equipment.

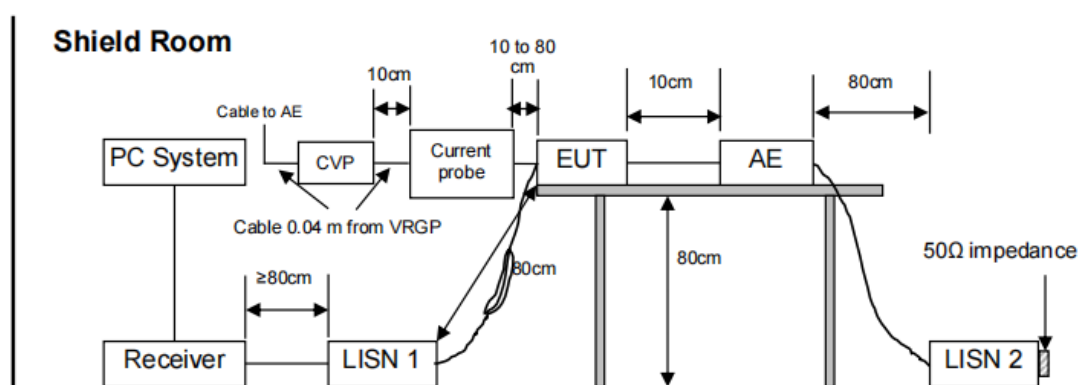

EUT means Equipment Under Test

AE means Associated Equipment.

3.3. Limits

Voltage limits: Class A				
Frequency			Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz	~	500kHz	97 ~ 87*	84 ~ 74*
0.5MHz	~	30MHz	87	74
Voltage limits: Class B				
150kHz	~	500kHz	84 ~ 74*	74 ~ 64*
0.5MHz	~	30MHz	74	64
Current limits: Class A				
Frequency			Quasi-Peak Level dB(μA)	Average Level dB(μA)
150kHz	~	500kHz	53 ~ 43*	40 ~ 30*
0.5MHz	~	30MHz	43	30
Current limits: Class B				
150kHz	~	500kHz	40 ~ 30*	30 ~ 20*
0.5MHz	~	30MHz	30	20
Notes: 1. * Decreasing linearly with logarithm of frequency. 2. The lower limit shall apply at the transition frequencies.				

3.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Speaker	N/A	Bar 2.0	/	/
Laptop	HP	HP ZHAN 66 Pro A 14 G5	/	/
Earphone	N/A	N/A	/	/
Speaker	JBL	JBL GO	/	/
Router	Mi	R4A	/	/
USB Flash	Kingston	DT101 G2	/	/

3.5. Test procedure

The EUT placement requires reference to the test block diagram and is placed on a non-metallic table in shielded room.

Connect ISN directly to reference ground plane.

The measured voltage at the measurement port of the ISN should correct the reading by adding the voltage division factor of the ISN, and compare to the voltage limit.

1. For broadcast receiver tuner ports (only applies limits of Class B):

a. For EUTs that support audio signals, the signal used to exercise the EUT shall be a 1 kHz sinusoidal signal unless otherwise specified as more appropriate by the manufacturer.

b. EUTs that display video images or EUTs with ports that are used to provide video signals shall be exercised in accordance with Table B.1 and configured, where possible, using the parameters given in Table B.2. (Table B.1 and B.2 see to standard EN 55032)

Video ports shall output signals, and images shall be displayed, corresponding to the highest complexity level listed in Table B.1 that the EUT is capable of generating. However, the manufacturer may choose to exercise the displays and video ports using the text image given in Table B.1 (Complexity level 2) where emission levels using this text image are not reduced in comparison to emission levels obtained using Complexity levels 3 or 4.

2. For Local Area Network (LAN) device, if ports supporting Ethernet traffic (for example 100Base-T, 1000Base-T), that can operate at multiple rates, measurements may be limited to mode in which the EUT operates at its maximum rate.

When assessing an EUT transmitting 10Base-T Ethernet traffic, apply the following:

In order to make reliable emission measurements representative of high LAN utilization it is only necessary to create a condition of LAN utilization in excess of 10 % and sustain that level for a minimum of 250 ms. The content of the test traffic should consist of both periodic and pseudo-random messages in order to emulate realistic types of data transmission (e.g. random: files compressed or encrypted; periodic: uncompressed graphic files, memory dumps, screen updates, disk images). If the LAN maintains transmission during idle periods measurements shall also be made during idle periods.

When disturbance voltage measurements are performed on a single unscreened balanced pair, an adequate ISN for two wires shall be used; when performed on unscreened cables containing two balanced pairs, an adequate ISN for four wires shall be used.

3. Antenna port all other ports not defined above:

A representative signal shall be defined by the manufacturer.

3.6. Test result

Pass. (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.


Note 2: “----” means Peak detection; “-----” means Average detection.

3.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25090923-1E\1018 CE-T.EM6
Test Date : 2025-10-18 Tested By : Alex Liu
Power Supply : 100V/50Hz Test Mode : LAN mode
Condition : TEMP:22.6°C, RH:63.1% ISN : 2025 ENY81/
Sample No. : S25090923-003
Memo : 1000 Base-T

Data: 22

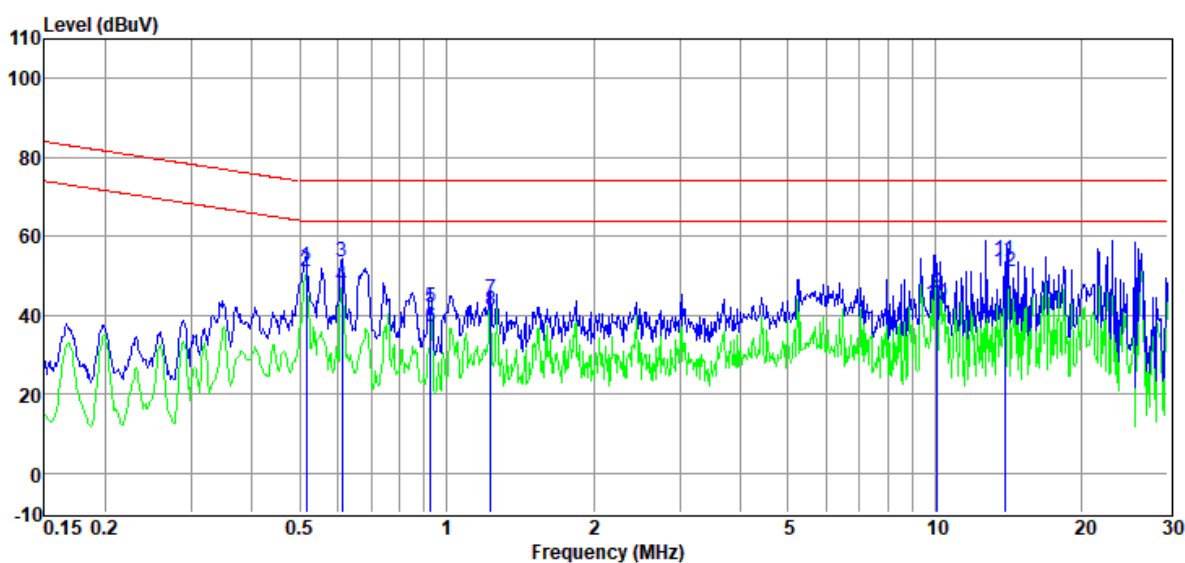

Item	Freq.	Read	ISN	Cable	Pulse	Result	Limit	Margin	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	Limiter	(dBμV)	(dBμV)	(dB)	
					Factor				
1	0.52	31.93	10.52	0.09	9.89	52.43	74.00	21.57	QP
2	0.52	30.42	10.52	0.09	9.89	50.92	64.00	13.08	Average
3	0.61	32.98	10.50	0.11	9.89	53.48	74.00	20.52	QP
4	0.61	26.95	10.50	0.11	9.89	47.45	64.00	16.55	Average
5	0.93	21.29	10.44	0.14	9.90	41.77	74.00	32.23	QP
6	0.93	16.68	10.44	0.14	9.90	37.16	64.00	26.84	Average
7	1.23	23.55	10.42	0.16	9.90	44.03	74.00	29.97	QP
8	1.23	20.85	10.42	0.16	9.90	41.33	64.00	22.67	Average
9	10.13	26.13	9.43	0.26	9.83	45.65	74.00	28.35	QP
10	10.13	23.41	9.43	0.26	9.83	42.93	64.00	21.07	Average
11	13.92	33.83	9.70	0.33	9.89	53.75	74.00	20.25	QP
12	13.92	30.96	9.70	0.33	9.89	50.88	64.00	13.12	Average

Note:


1. Result Level = Read Level + ISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
 Test Date : 2025-10-18
 Power Supply : 100V/60Hz
 Condition : TEMP:22.6°C, RH:63.1%
 Sample No. : S25090923-003
 Memo : 1000 Base-T

D:\2025 CE report data\Q25090923-1E\1018 CE-T.EM6
 Tested By : Alex Liu
 Test Mode : LAN mode
 ISN : 2025 ENY81/

Data: 24

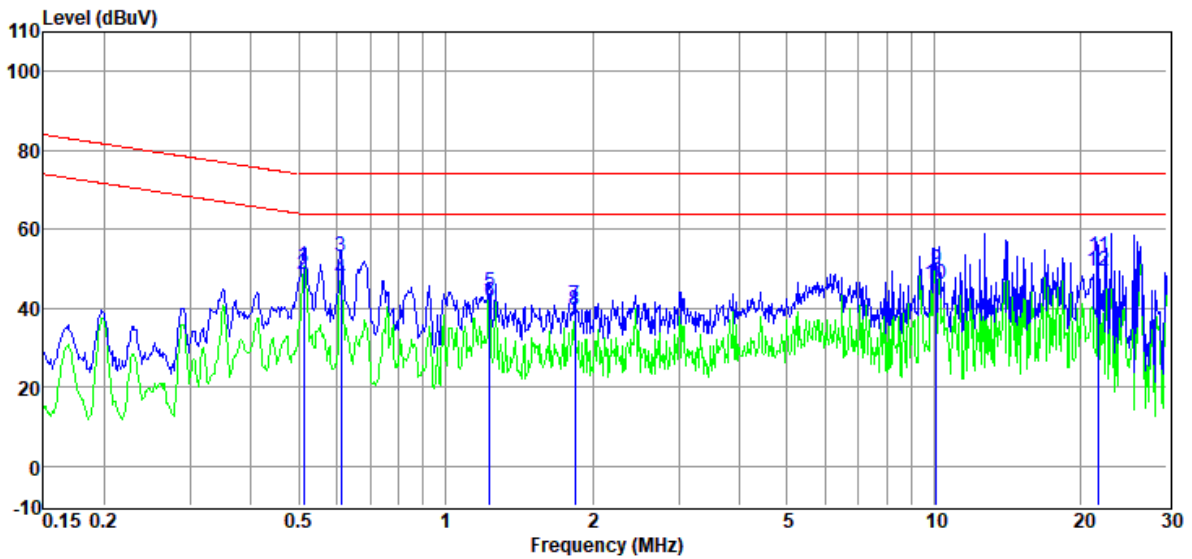

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	ISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector
1	0.51	30.15	10.52	0.09	9.89	50.65	74.00	23.35	QP
2	0.51	27.99	10.52	0.09	9.89	48.49	64.00	15.51	Average
3	0.61	32.58	10.50	0.11	9.89	53.08	74.00	20.92	QP
4	0.61	26.93	10.50	0.11	9.89	47.43	64.00	16.57	Average
5	1.23	23.72	10.42	0.16	9.90	44.20	74.00	29.80	QP
6	1.23	21.17	10.42	0.16	9.90	41.65	64.00	22.35	Average
7	1.84	20.07	10.40	0.17	9.89	40.53	74.00	33.47	QP
8	1.84	19.00	10.40	0.17	9.89	39.46	64.00	24.54	Average
9	10.13	30.15	9.43	0.26	9.83	49.67	74.00	24.33	QP
10	10.13	26.68	9.43	0.26	9.83	46.20	64.00	17.80	Average
11	21.72	33.24	9.61	0.41	9.96	53.22	74.00	20.78	QP
12	21.72	29.50	9.61	0.41	9.96	49.48	64.00	14.52	Average

Note:

1. Result Level = Read Level + ISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

3.8. Test photo




4. Conducted disturbance at mains terminals

4.1. Test equipment


Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
EMI Test Receiver	R&S	ESCI [®]	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/

4.2. Block diagram of test setup


For table-top equipment

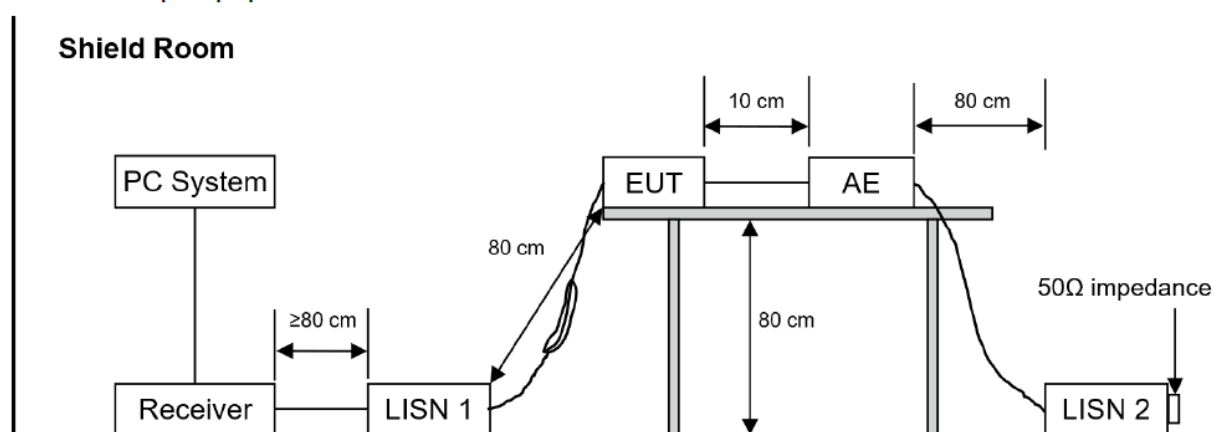

For floor standing equipment

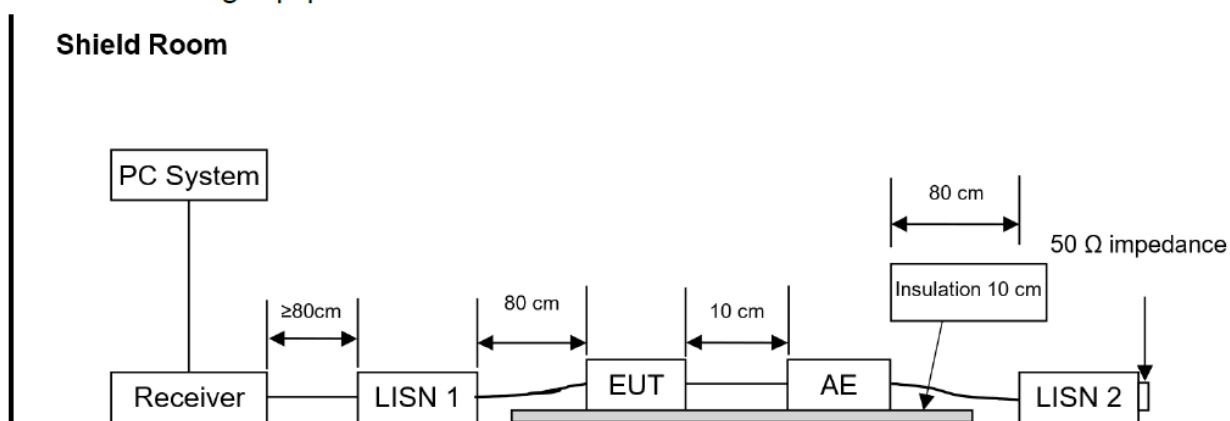

For combinations equipment

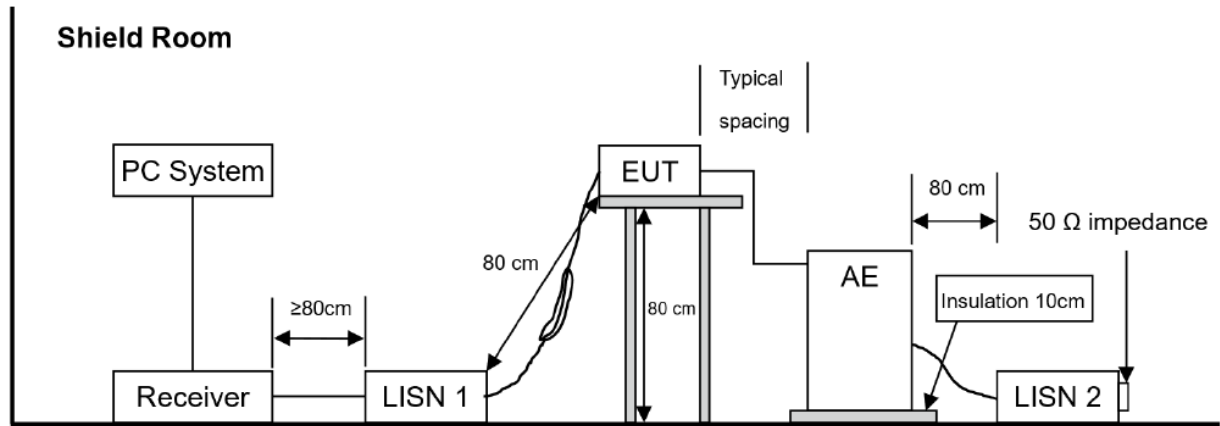

4.3. Limits

Class A:		
Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz~500 kHz	79	66
500 kHz~30 MHz	73	60
Class B:		
Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Notes:1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Earphone	N/A	N/A	/	/
Router	Mi	R4A	/	/
USB Flash	Kingston	DT101 G2	/	/
Speaker	N/A	Bar 2.0	/	/
Speaker	JBL	JBL GO	/	/
Laptop	HP	HP ZHAN 66 Pro A 14 G5	/	/

4.5. Test procedure

- (1) The EUT placement requires reference to the test block diagram and is placed on a non-metallic table.
- (2) Setup the EUT and assistant equipment as shown above block diagram and equipment list.
- (3) The EUT's power adapter was connected to the power mains through a line impedance stabilization network (L.I.S.N). which this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted disturbance. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to EN 55032 on conducted disturbance emission test.
- (4) The bandwidth of test receiver is set at 9 kHz.
- (5) The frequency range from 150 kHz to 30 MHz is checked.

4.6. Test result

Pass. (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.


Note 2: "----" means Peak detection; "----" means Average detection.

4.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25090923-1E\1018 CE.EM6**
Test Date : 2025-10-18 **Tested By** : Aaron Liu
Power Supply : AC 100V/50Hz **Test Mode** : HDMI 1 in mode
Condition : TEMP:23.4°C, RH:61.2% **LISN** : 2025 1# 216/LINE
Sample No. : S25090923-003

Data: 10

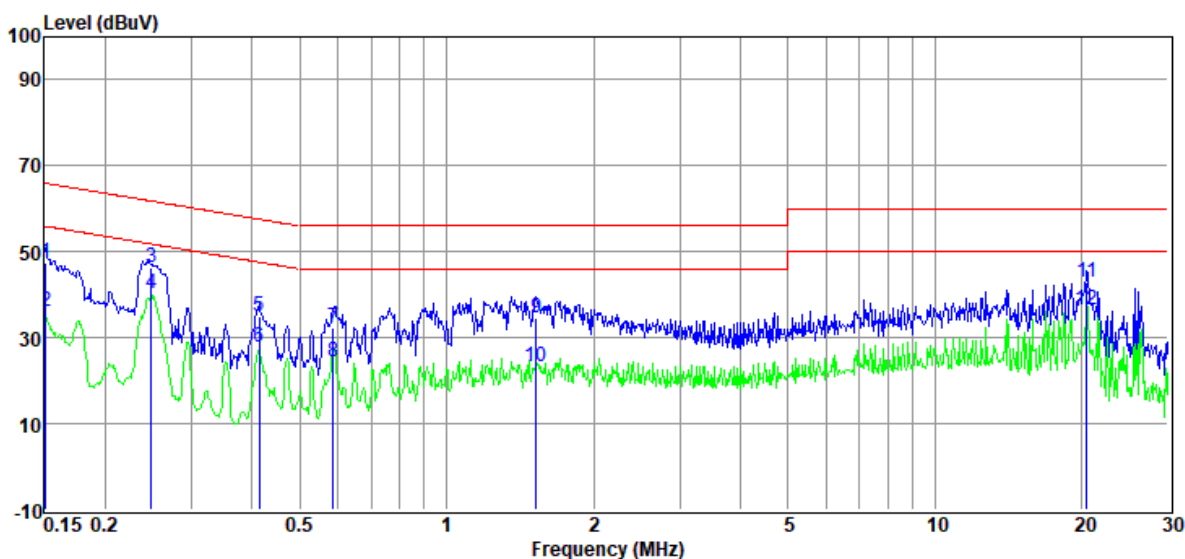

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	27.69	9.85	0.05	9.89	47.48	65.96	18.48	QP	LINE
2	0.15	16.36	9.85	0.05	9.89	36.15	55.96	19.81	Average	LINE
3	0.25	26.54	9.82	0.06	9.89	46.31	61.82	15.51	QP	LINE
4	0.25	20.49	9.82	0.06	9.89	40.26	51.82	11.56	Average	LINE
5	0.41	15.48	9.70	0.08	9.89	35.15	57.59	22.44	QP	LINE
6	0.41	8.05	9.70	0.08	9.89	27.72	47.59	19.87	Average	LINE
7	0.59	12.55	9.92	0.10	9.89	32.46	56.00	23.54	QP	LINE
8	0.59	4.55	9.92	0.10	9.89	24.46	46.00	21.54	Average	LINE
9	1.53	14.82	9.86	0.16	9.89	34.73	56.00	21.27	QP	LINE
10	1.53	3.18	9.86	0.16	9.89	23.09	46.00	22.91	Average	LINE
11	20.49	21.99	10.39	0.41	9.95	42.74	60.00	17.26	QP	LINE
12	20.49	15.84	10.39	0.41	9.95	36.59	50.00	13.41	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25090923-1E\1018 CE.EM6
Test Date : 2025-10-18 Tested By : Aaron Liu
Power Supply : AC 100V/50Hz Test Mode : HDMI 1 in mode
Condition : TEMP:23.4°C, RH:61.2% LISN : 2025 1# 216/NEUTRAL
Sample No. : S25090923-003

Data: 12

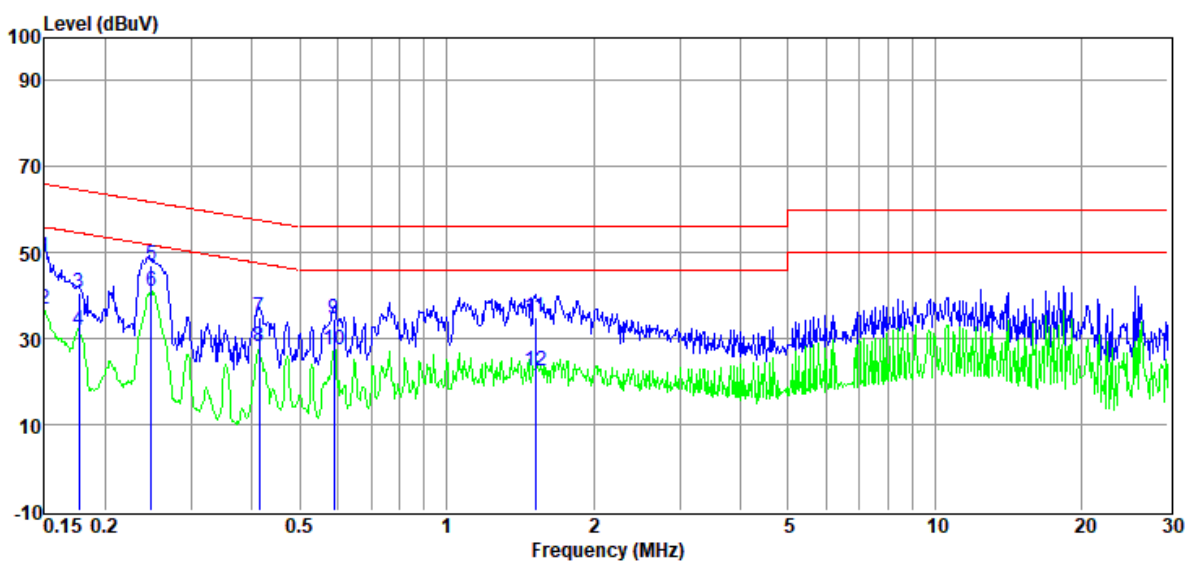

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	29.45	9.77	0.05	9.89	49.16	66.00	16.84	QP	NEUTRAL
2	0.15	17.02	9.77	0.05	9.89	36.73	56.00	19.27	Average	NEUTRAL
3	0.18	21.04	9.72	0.06	9.89	40.71	64.64	23.93	QP	NEUTRAL
4	0.18	12.41	9.72	0.06	9.89	32.08	54.64	22.56	Average	NEUTRAL
5	0.25	27.42	9.84	0.06	9.89	47.21	61.82	14.61	QP	NEUTRAL
6	0.25	21.21	9.84	0.06	9.89	41.00	51.82	10.82	Average	NEUTRAL
7	0.41	15.22	9.82	0.08	9.89	35.01	57.59	22.58	QP	NEUTRAL
8	0.41	8.28	9.82	0.08	9.89	28.07	47.59	19.52	Average	NEUTRAL
9	0.59	14.80	9.88	0.10	9.89	34.67	56.00	21.33	QP	NEUTRAL
10	0.59	7.45	9.88	0.10	9.89	27.32	46.00	18.68	Average	NEUTRAL
11	1.52	15.25	9.83	0.16	9.89	35.13	56.00	20.87	QP	NEUTRAL
12	1.52	2.60	9.83	0.16	9.89	22.48	46.00	23.52	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-10-18
Power Supply : AC 100V/60Hz
Condition : TEMP:23.4°C, RH:61.2%
Sample No. : S25090923-003

D:\2025 CE report data\Q25090923-1E\1018 CE.EM6
Tested By : Aaron Liu
Test Mode : HDMI 1 in mode
LISN : 2025 1# 216/NEUTRAL

Data: 14

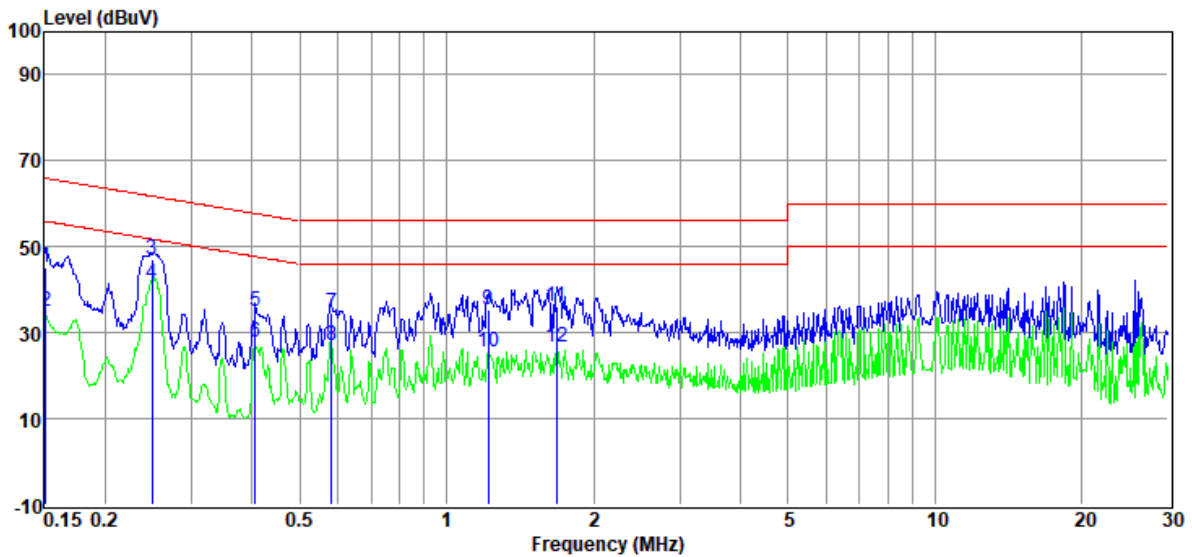

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	25.38	9.77	0.05	9.89	45.09	65.96	20.87	QP	NEUTRAL
2	0.15	15.42	9.77	0.05	9.89	35.13	55.96	20.83	Average	NEUTRAL
3	0.25	27.24	9.84	0.06	9.89	47.03	61.78	14.75	QP	NEUTRAL
4	0.25	21.62	9.84	0.06	9.89	41.41	51.78	10.37	Average	NEUTRAL
5	0.41	15.18	9.81	0.08	9.89	34.96	57.73	22.77	QP	NEUTRAL
6	0.41	8.15	9.81	0.08	9.89	27.93	47.73	19.80	Average	NEUTRAL
7	0.58	14.70	9.88	0.10	9.89	34.57	56.00	21.43	QP	NEUTRAL
8	0.58	7.18	9.88	0.10	9.89	27.05	46.00	18.95	Average	NEUTRAL
9	1.22	15.30	9.89	0.15	9.90	35.24	56.00	20.76	QP	NEUTRAL
10	1.22	5.70	9.89	0.15	9.90	25.64	46.00	20.36	Average	NEUTRAL
11	1.68	16.36	9.81	0.16	9.89	36.22	56.00	19.78	QP	NEUTRAL
12	1.68	6.74	9.81	0.16	9.89	26.60	46.00	19.40	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-10-18
Power Supply : AC 100V/60Hz
Condition : TEMP:23.4°C, RH:61.2%
Sample No. : S25090923-003

D:\2025 CE report data\Q25090923-1E\1018 CE.EM6
Tested By : Aaron Liu
Test Mode : HDMI 1 in mode
LISN : 2025 1# 216/LINE

Data: 16

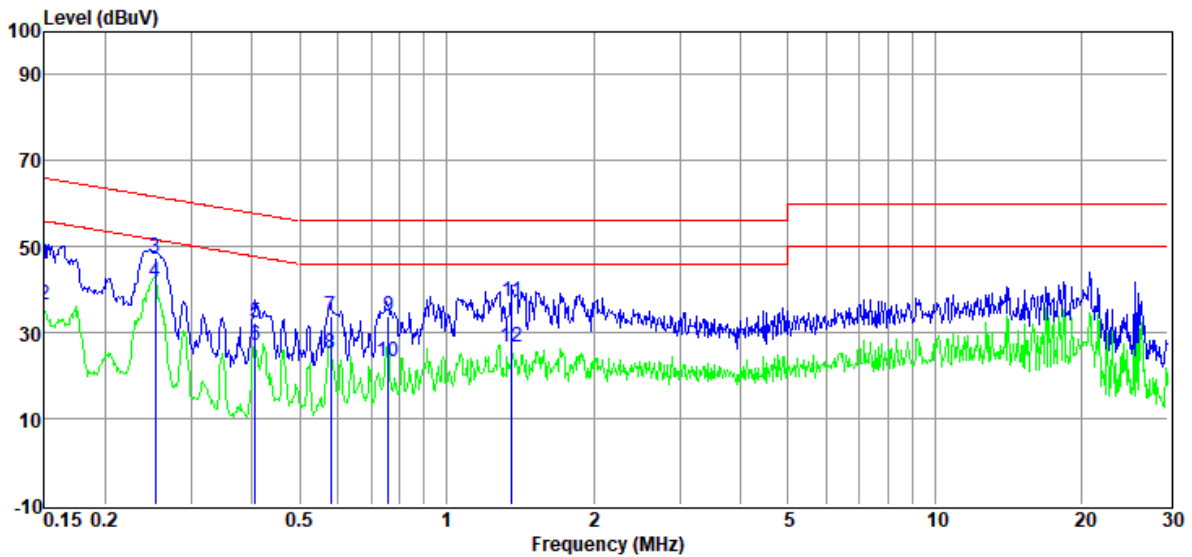

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	25.98	9.85	0.05	9.89	45.77	66.00	20.23	QP	LINE
2	0.15	16.78	9.85	0.05	9.89	36.57	56.00	19.43	Average	LINE
3	0.25	27.67	9.81	0.06	9.89	47.43	61.64	14.21	QP	LINE
4	0.25	22.12	9.81	0.06	9.89	41.88	51.64	9.76	Average	LINE
5	0.41	12.80	9.70	0.08	9.89	32.47	57.73	25.26	QP	LINE
6	0.41	7.48	9.70	0.08	9.89	27.15	47.73	20.58	Average	LINE
7	0.58	13.79	9.91	0.10	9.89	33.69	56.00	22.31	QP	LINE
8	0.58	5.18	9.91	0.10	9.89	25.08	46.00	20.92	Average	LINE
9	0.76	14.09	9.81	0.13	9.90	33.93	56.00	22.07	QP	LINE
10	0.76	3.40	9.81	0.13	9.90	23.24	46.00	22.76	Average	LINE
11	1.36	17.32	9.89	0.16	9.90	37.27	56.00	18.73	QP	LINE
12	1.36	6.88	9.89	0.16	9.90	26.83	46.00	19.17	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

4.8. Test photo



5. Radiated Emissions


5.1. Test equipment

Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
EMI Test Receiver	R&S	ESCI 3	DDT-ZC01972	2026/03/28
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC00246	2026/07/18
RF Cable	H&S	RG214-11	DDT-ZC01497	2026/03/28
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/
Horn Antenna	SCHWARZBECK	BBHA9120 D	DDT-ZC01218	2026/08/13
Preamplifier	COM-POWER	PAM-118A	DDT-ZC01489	2026/08/10
Spectrum Analyzer	Agilent	E4440A	DDT-ZC01445	2026/03/28
RF cable	Zhongke Junchuang	JCTB810-NJ-NJ-7M	DDT-ZC02759	2026/07/22
Spectrum Analyzer	Agilent	E4440A	DDT-ZC01445	2026/03/28
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Horn Antenna	SCHWARZBECK	BBHA9120 D	DDT-ZC01218	2026/08/13
Preamplifier	COM-POWER	PAM-118A	DDT-ZC01489	2026/08/10
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/
RF cable	Zhongke Junchuang	JCTB810-NJ-NJ-7M	DDT-ZC02759	2026/07/22


5.2. Block diagram of test setup

Below 1 GHz


For table-top equipment

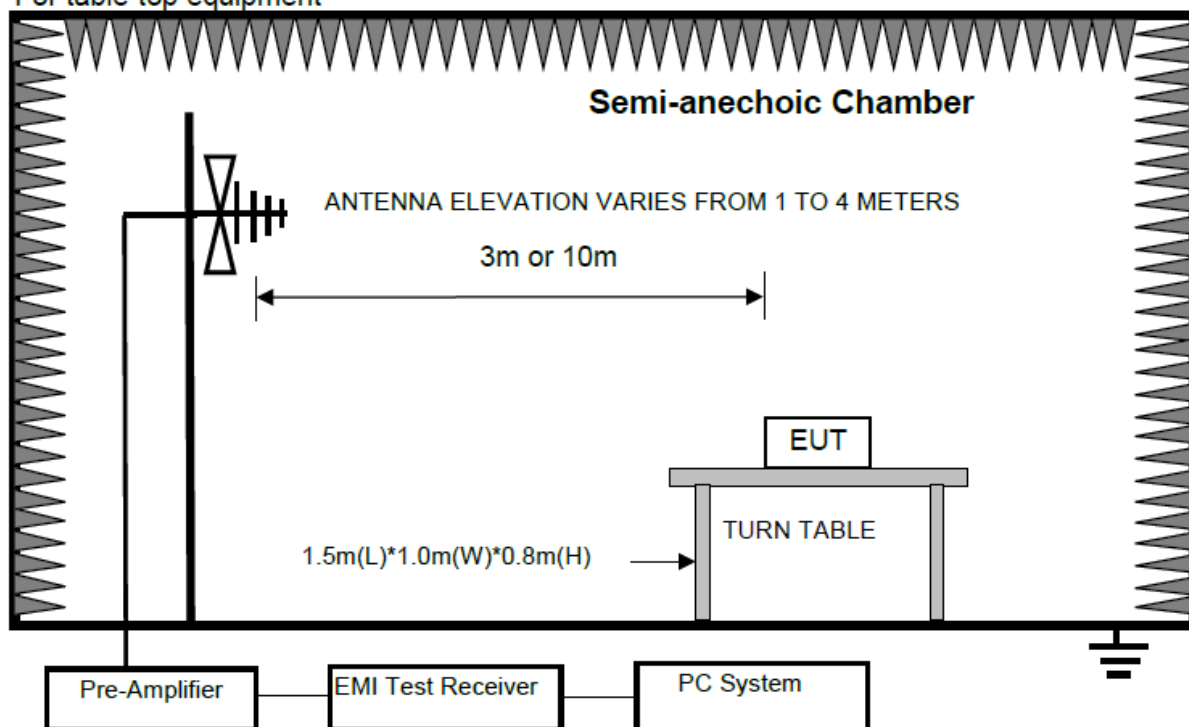


For floor standing equipment

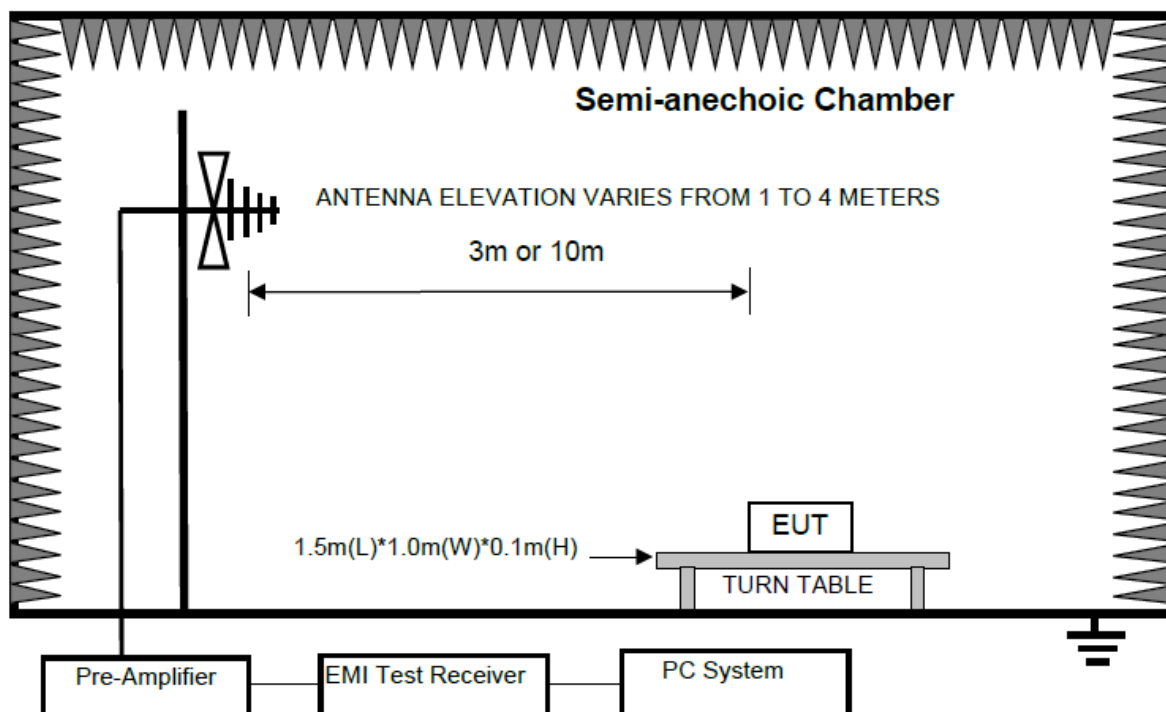


For combinations equipment

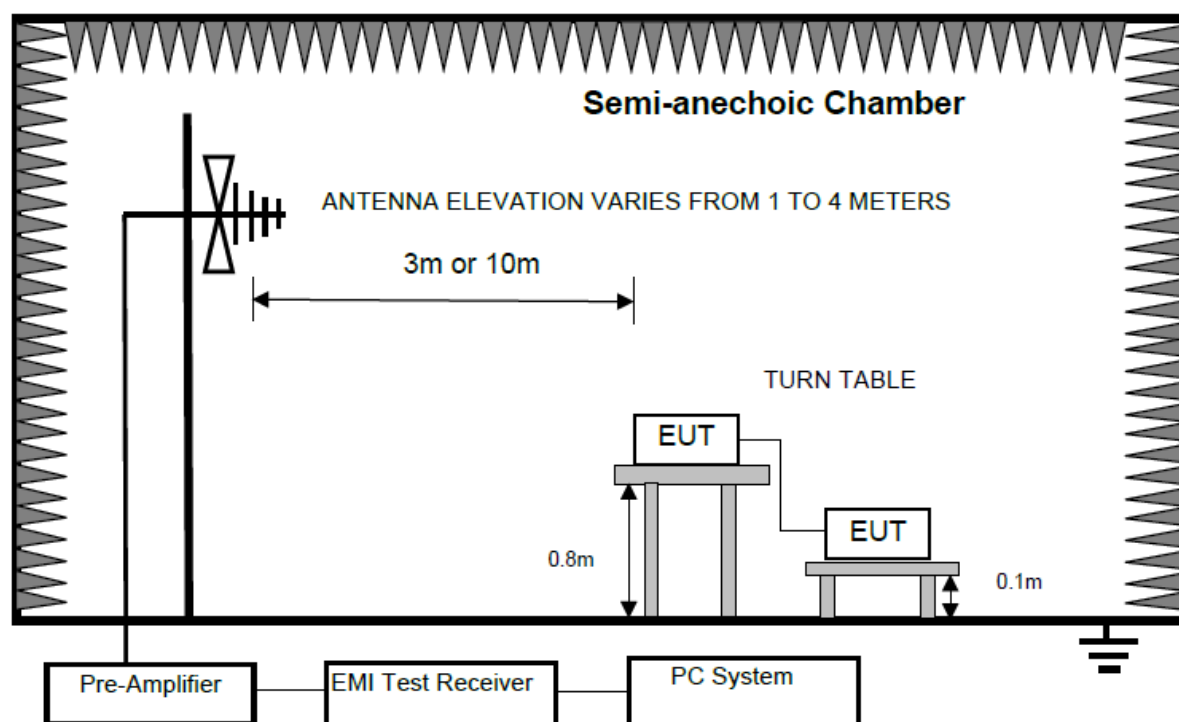


Above 1 GHz
For table-top equipment

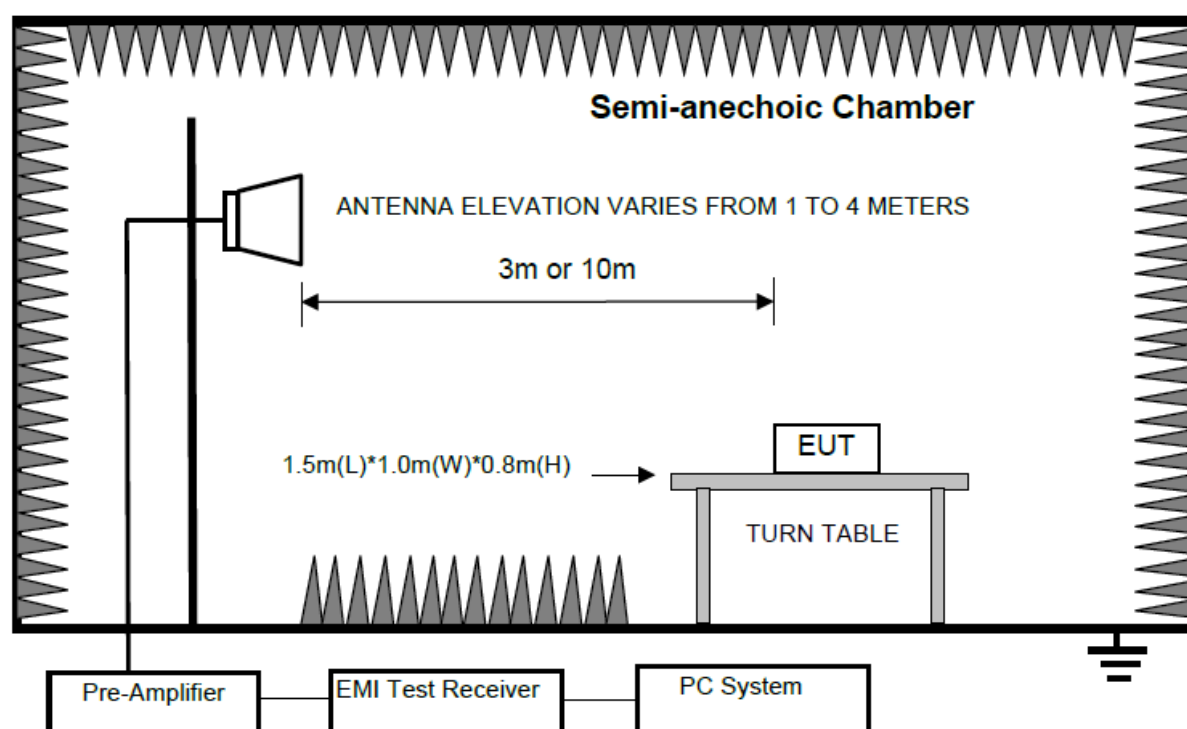

For floor standing equipment

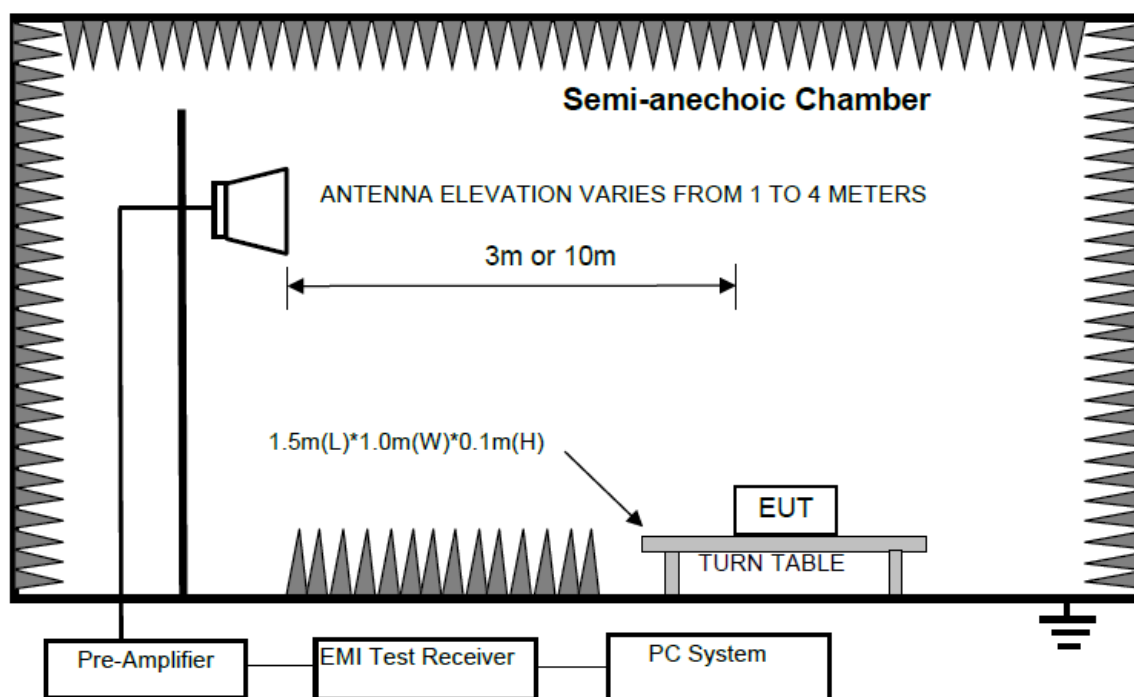

For combinations equipment

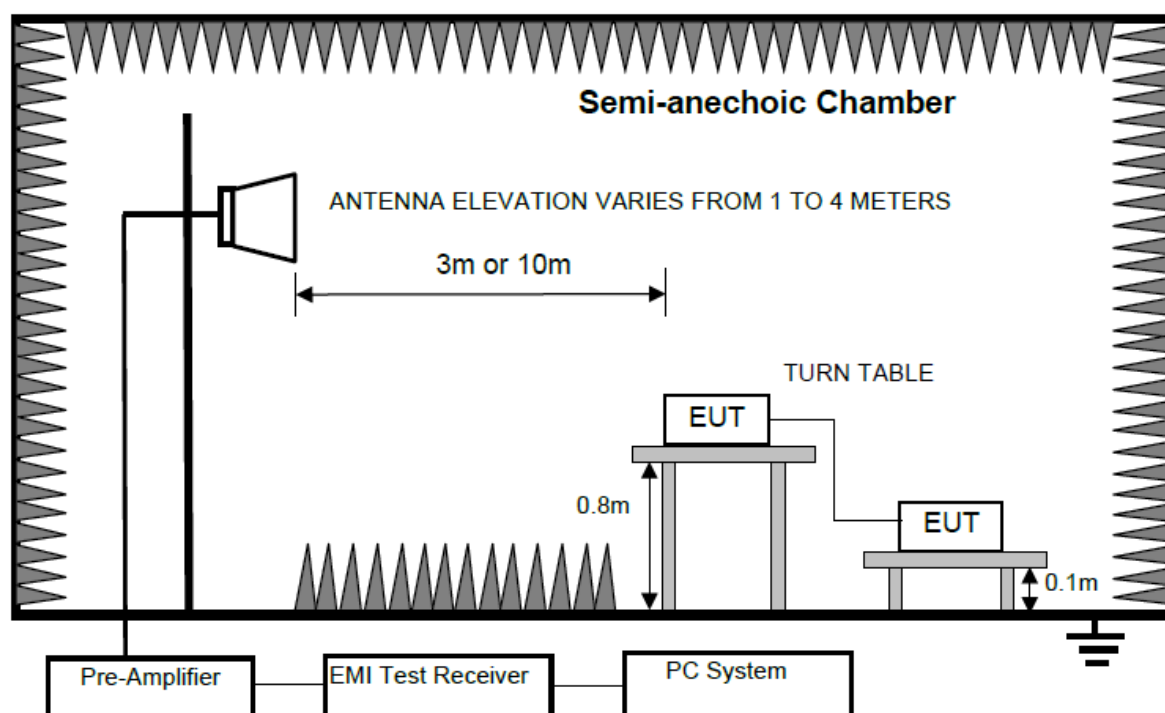

5.3. Limits

Class A			
Equipment	Frequency	Field Strengths Limits at 10m measuring distance dB(μ V)/m	Field Strengths Limits at 3m measuring distance dB(μ V)/m
Class A Equipment	30 MHz to 230 MHz	40	50
	230 MHz to 1 GHz	47	57
	1 GHz to 3 GHz	/	Average:56; Peak:76
	3 GHz to 6 GHz	/	Average:60; Peak:80
Class B			
Equipment	Frequency	Field Strengths Limits at 10m measuring distance dB(μ V)/m	Field Strengths Limits at 3m measuring distance dB(μ V)/m
Class B Equipment	30 MHz to 230 MHz	30	40
	230 MHz to 1 GHz	37	47
	1 GHz to 3 GHz	/	Average:50; Peak:70
	3 GHz to 6 GHz	/	Average:54; Peak:74
FM receivers*	30 MHz to 1 GHz	Fundamental 50	Fundamental 60
	30 MHz to 300 MHz	Harmonics 42	Harmonics 52
	300 MHz to 1 GHz	Harmonics 46	Harmonics 56

*: These relaxed limits apply only to emission at the fundamental and harmonic frequencies of the local oscillator signals at all other frequencies shall be compliant with the limits of class B equipment given above.

Note:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

5.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Speaker	JBL	JBL GO	/	/
USB Flash	Kingston	DT101 G2	/	/
Earphone	N/A	N/A	/	/
Laptop	HP	HP ZHAN 66 Pro A 14 G5	/	/
Speaker	N/A	Bar 2.0	/	/
Speaker	Edifier	R1280DBs	/	/
Router	Mi	R4A	/	/

5.5. Test procedure

- (1) The EUT was placed on a non-metallic table (Refer to the 'Block diagram of test setup'). above the ground plane inside an anechoic chamber.
- (2) Test antenna center was located 3m or 10m from the EUT and assistant equipment boundary (imaginary circular periphery) on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to J 55032 on radiated emission test.
- (3) Spectrum frequency from 30 MHz to 1 GHz was investigated.
- (4) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to J 55032 on Radiated Emission test.
- (5) For emissions from 30 MHz to 1 GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.
- (6) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz VBW is set at 3 MHz.

5.6. Test result

Pass. (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.

Note 2: "-----" means Peak detection.

5.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2025 RE2# Report Data\Q25090923-1E\1104 RE.EM6

Test Date : 2025-11-04

Tested By : Andy Li

Power Supply : AC 100V/60Hz


Test Mode : HDMI 1 in mode

Condition : Temp:22.4°C,Humi:54.2%

Antenna/Distance : 2025 2# ANT 9163/3m/HORIZONTAL

Sample No. : S25090923-006

Data: 5

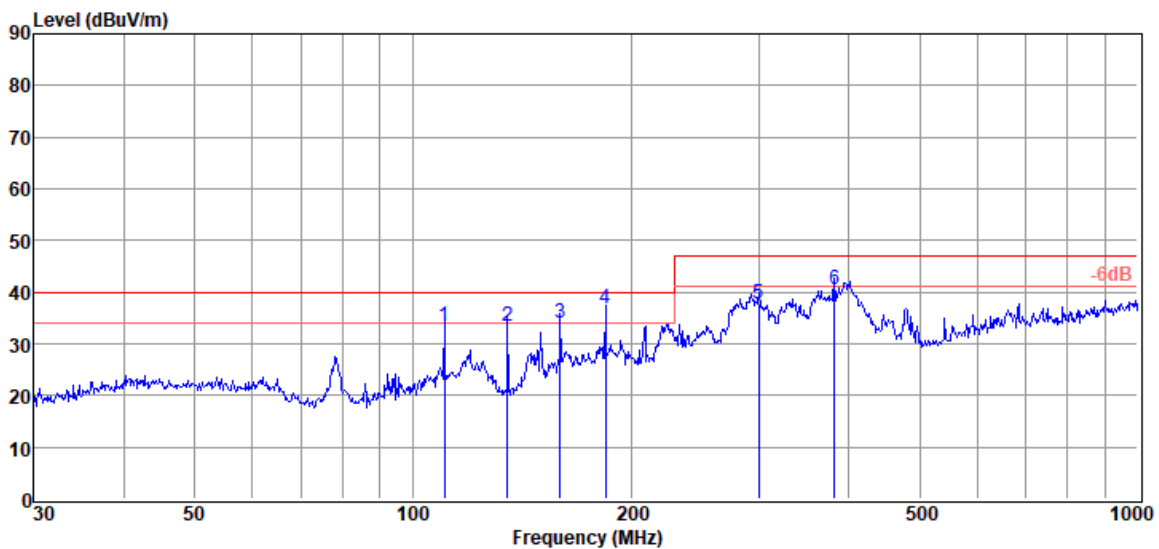

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	110.57	16.95	11.74	4.57	33.26	40.00	6.74	QP	HORIZONTAL
2	135.03	20.39	8.19	4.78	33.36	40.00	6.64	QP	HORIZONTAL
3	159.78	20.28	8.76	4.96	34.00	40.00	6.00	QP	HORIZONTAL
4	184.49	21.70	9.90	5.12	36.72	40.00	3.28	QP	HORIZONTAL
5	300.37	18.78	13.31	5.76	37.85	47.00	9.15	QP	HORIZONTAL
6	381.25	18.94	15.35	6.27	40.56	47.00	6.44	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2025 RE2# Report Data\Q25090923-1E\1104 RE.EM6

Test Date : 2025-11-04

Tested By : Andy Li

Power Supply : AC 100V/60Hz


Test Mode : HDMI 1 in mode

Condition : Temp:22.4°C,Humi:54.2%

Antenna/Distance : 2025 2# ANT 9163/3m/VERTICAL

Sample No. : S25090923-006

Data: 6

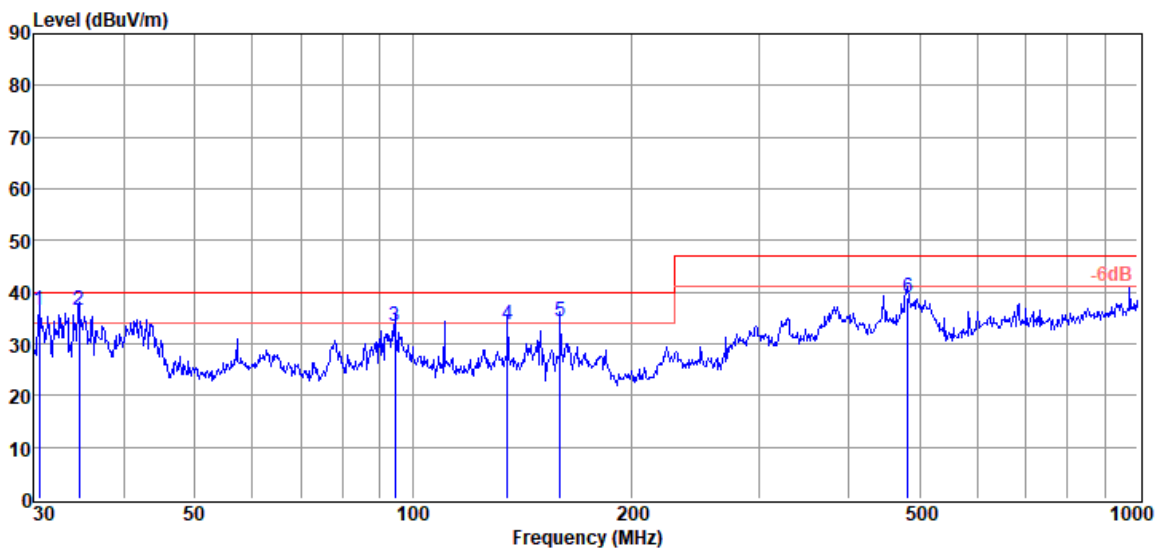

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	30.53	21.80	10.89	3.67	36.36	40.00	3.64	QP	VERTICAL
2	34.64	21.50	11.26	3.76	36.52	40.00	3.48	QP	VERTICAL
3	94.43	18.68	10.43	4.42	33.53	40.00	6.47	QP	VERTICAL
4	135.03	20.73	8.19	4.78	33.70	40.00	6.30	QP	VERTICAL
5	159.78	20.49	8.76	4.96	34.21	40.00	5.79	QP	VERTICAL
6	482.22	15.69	16.51	6.84	39.04	47.00	7.96	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2# D:\2025 RE2# Report Data\Q25090923-1E\1104 RE.EM6


Test Date : 2025-11-04 Tested By : Andy Li

Power Supply : AC 100V/50Hz Test Mode : HDMI 1 in mode

Condition : Temp:22.4°C,Humi:54.2% Antenna/Distance : 2025 2# ANT 9163/3m/VERTICAL

Sample No. : S25090923-006

Data: 7

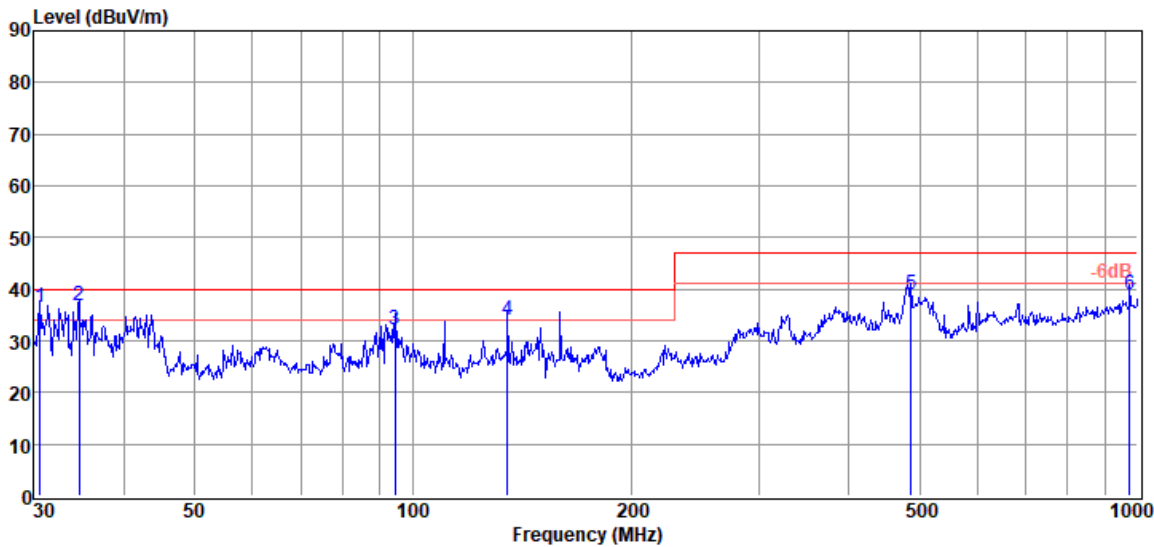

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	30.64	22.11	10.87	3.67	36.65	40.00	3.35	QP	VERTICAL
2	34.64	21.80	11.26	3.76	36.82	40.00	3.18	QP	VERTICAL
3	94.43	17.27	10.43	4.42	32.12	40.00	7.88	QP	VERTICAL
4	135.03	20.97	8.19	4.78	33.94	40.00	6.06	QP	VERTICAL
5	487.32	15.55	16.59	6.87	39.01	47.00	7.99	QP	VERTICAL
6	975.75	7.52	22.40	8.94	38.86	47.00	8.14	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 2#

Test Date

: 2025-11-04

Power Supply

: AC 100V/50Hz

Condition

: Temp:22.4°C,Humi:54.2%

Sample No.

: S25090923-006

D:\2025 RE2# Report Data\Q25090923-1E\1104 RE.EM6

Tested By

: Andy Li


Test Mode

: HDMI 1 in mode

Antenna/Distance

: 2025 2# ANT 9163/3m/HORIZONTAL

Data: 8

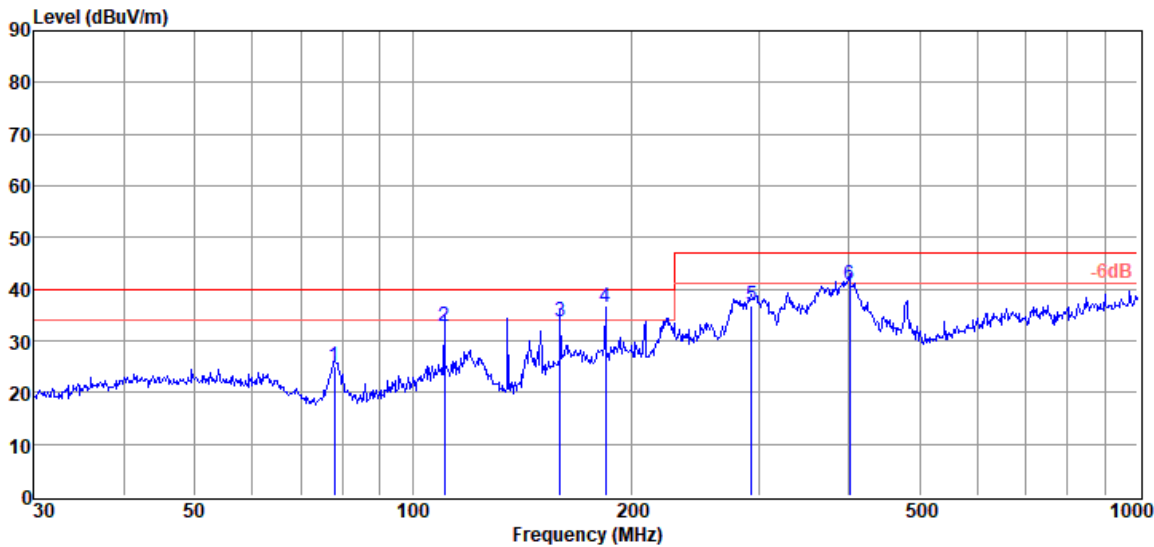

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	77.87	12.74	8.03	4.29	25.06	40.00	14.94	QP	HORIZONTAL
2	110.57	16.56	11.74	4.57	32.87	40.00	7.13	QP	HORIZONTAL
3	159.78	20.09	8.76	4.96	33.81	40.00	6.19	QP	HORIZONTAL
4	184.49	21.52	9.90	5.12	36.54	40.00	3.46	QP	HORIZONTAL
5	293.08	17.94	13.25	5.73	36.92	47.00	10.08	QP	HORIZONTAL
6	400.43	18.91	15.65	6.37	40.93	47.00	6.07	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-10-20

Power Supply

: AC 100V/60Hz

Condition

: Temp:19.4°C,Humi:60.9%

Sample No.

: S25090923-003

D\2025 RE 1# Report data\Q25090923-1E\1020 RE-H.EM6

Tested By

: Li guilin


Test Mode

: HDMI 1 in mode

Antenna/Distance

: 2025 9120D 1#/3m/VERTICAL

Data: 5

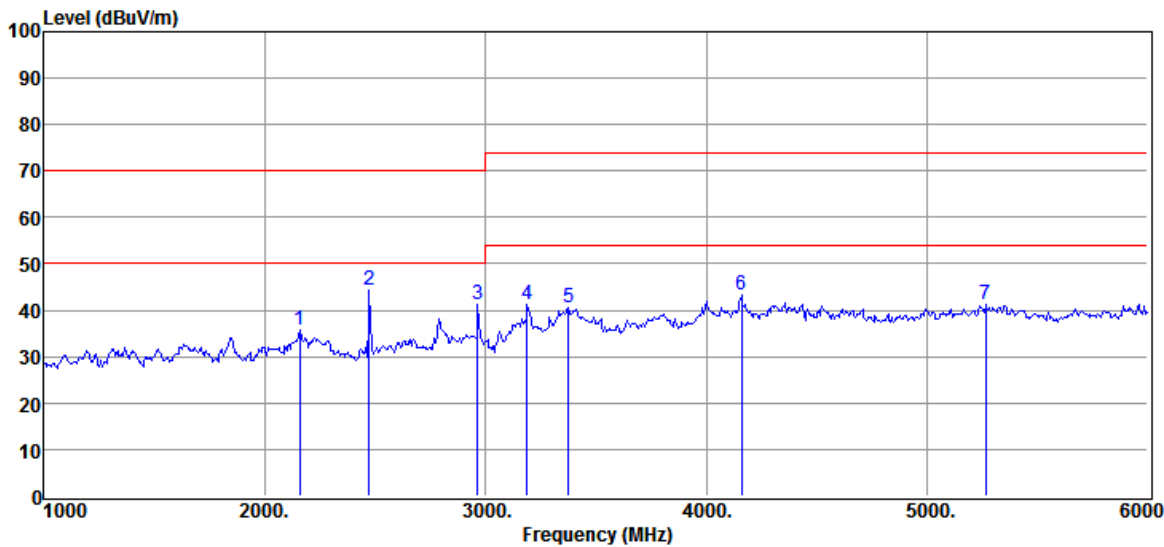

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2160.00	56.55	27.20	53.08	4.94	35.61	70.00	-34.39	Peak	VERTICAL
2	2475.00	64.62	27.50	53.05	5.20	44.27	70.00	-25.73	Peak	VERTICAL
3	2965.00	60.11	28.44	53.00	5.60	41.15	70.00	-28.85	Peak	VERTICAL
4	3190.00	59.77	28.66	53.11	5.80	41.12	74.00	-32.88	Peak	VERTICAL
5	3375.00	59.17	28.75	53.22	5.96	40.66	74.00	-33.34	Peak	VERTICAL
6	4160.00	59.88	30.22	53.54	6.60	43.16	74.00	-30.84	Peak	VERTICAL
7	5265.00	54.76	32.88	53.54	7.19	41.29	74.00	-32.71	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

D\2025 RE 1# Report data\Q25090923-1E\1020 RE-H.EM6

Test Date

: 2025-10-20

Tested By

: Li guilin

Power Supply

: AC 100V/60Hz

Test Mode

: HDMI 1 in mode

Condition

: Temp:19.4°C,Humi:60.9%


Antenna/Distance

: 2025 9120D 1#/3m/HORIZONTAL

Sample No.

: S25090923-003

Data: 6

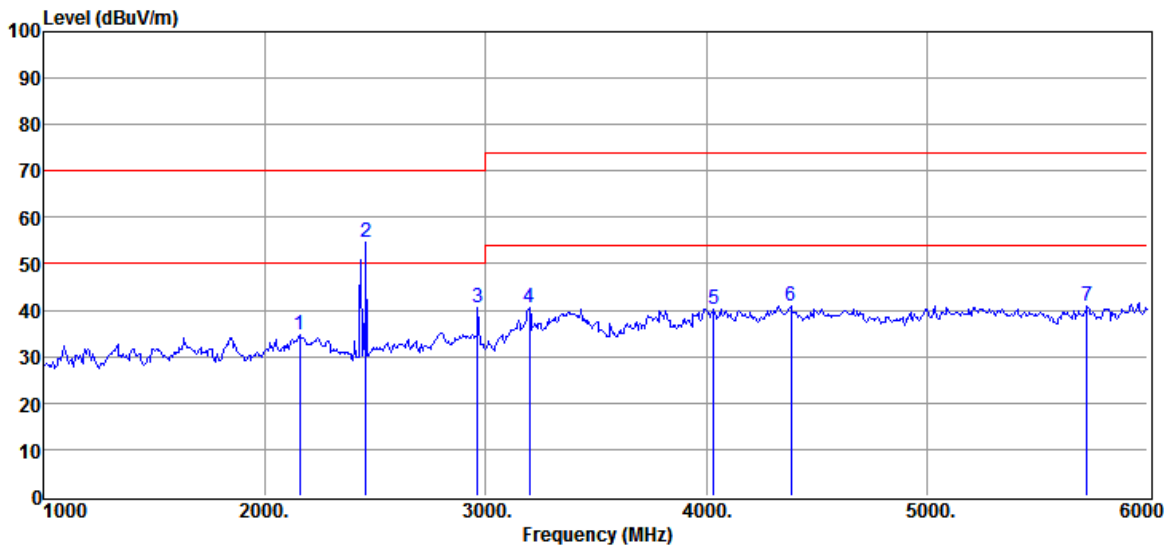

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2160.00	55.67	27.20	53.08	4.94	34.73	70.00	-35.27	Peak	HORIZONTAL
2	2460.00	74.79	27.68	53.05	5.19	54.61	Carrier Frequency			HORIZONTAL
3	2965.00	59.51	28.44	53.00	5.60	40.55	70.00	-29.45	Peak	HORIZONTAL
4	3200.00	59.20	28.70	53.12	5.81	40.59	74.00	-33.41	Peak	HORIZONTAL
5	4035.00	57.28	29.97	53.59	6.54	40.20	74.00	-33.80	Peak	HORIZONTAL
6	4385.00	56.96	30.68	53.45	6.70	40.89	74.00	-33.11	Peak	HORIZONTAL
7	5725.00	54.90	32.70	54.14	7.51	40.97	74.00	-33.03	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

D\2025 RE 1# Report data\Q25090923-1E\1020 RE-H.EM6

Test Date

: 2025-10-20

Tested By

: Li guilin

Power Supply

: AC 100V/50Hz

Test Mode

: HDMI 1 in mode

Condition

: Temp:19.4°C,Humi:60.9%


Antenna/Distance

: 2025 9120D 1#/3m/HORIZONTAL

Sample No.

: S25090923-003

Data: 7

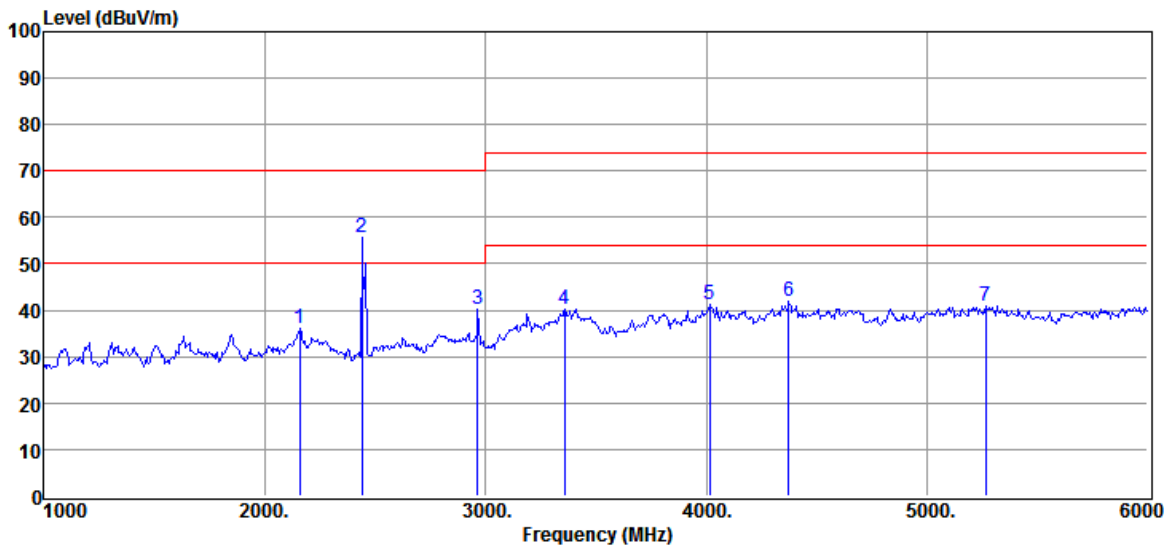

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2160.00	56.96	27.20	53.08	4.94	36.02	70.00	-33.98	Peak	HORIZONTAL
2	2440.00	75.79	27.76	53.06	5.17	55.66	Carrier Frequency			HORIZONTAL
3	2965.00	59.31	28.44	53.00	5.60	40.35	70.00	-29.65	Peak	HORIZONTAL
4	3360.00	58.41	28.96	53.22	5.95	40.10	74.00	-33.90	Peak	HORIZONTAL
5	4015.00	58.43	29.93	53.59	6.53	41.30	74.00	-32.70	Peak	HORIZONTAL
6	4375.00	57.91	30.60	53.45	6.70	41.76	74.00	-32.24	Peak	HORIZONTAL
7	5265.00	54.26	32.88	53.54	7.19	40.79	74.00	-33.21	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

D\2025 RE 1# Report data\Q25090923-1E\1020 RE-H.EM6

Test Date

: 2025-10-20

Tested By

: Li guilin

Power Supply

: AC 100V/50Hz

Test Mode

: HDMI 1 in mode

Condition

: Temp:19.4°C,Humi:60.9%


Antenna/Distance

: 2025 9120D 1#/3m/VERTICAL

Sample No.

: S25090923-003

Data: 8

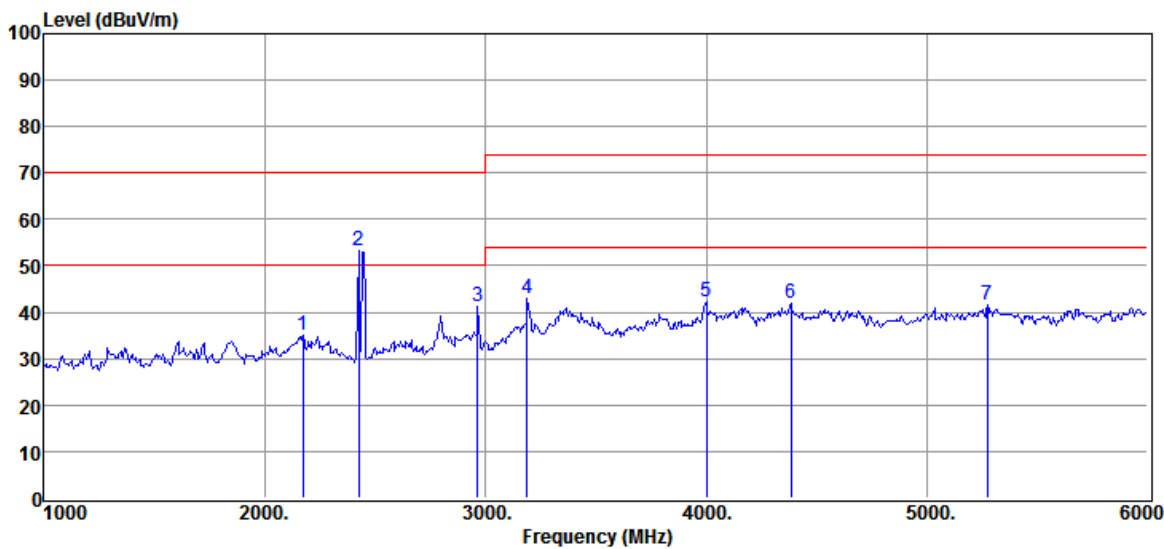

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2175.00	56.13	27.20	53.08	4.95	35.20	70.00	-34.80	Peak	VERTICAL
2	2425.00	73.41	27.70	53.06	5.16	53.21	Carrier Frequency			VERTICAL
3	2965.00	60.21	28.44	53.00	5.60	41.25	70.00	-28.75	Peak	VERTICAL
4	3190.00	61.66	28.66	53.11	5.80	43.01	74.00	-30.99	Peak	VERTICAL
5	4000.00	59.55	29.90	53.60	6.52	42.37	74.00	-31.63	Peak	VERTICAL
6	4385.00	58.04	30.68	53.45	6.70	41.97	74.00	-32.03	Peak	VERTICAL
7	5275.00	55.00	32.80	53.56	7.19	41.43	74.00	-32.57	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

5.8. Test photo



6. Photos of the EUT

Please refer to Appendix I : DDT-Q25090923-1E

-----End Report-----